



2430 – NuCanoe BlackPak

Assembly & Installation Instructions



(A) x 5



(B) x 11



(C) x 5



(D) x 4



(E) x 2



(F) x 14


1. Insert T-Connectors (F) into all T-Slots in the BlackPak panels.




2. Connect Handle Panels to Base Panel. Orient Base Panel so countersunk holes are facing up. Use screw (B) to secure Handle Panel to T-Connectors on base.



3. Insert Bungee through holes beneath handle hole and tie off to secure.

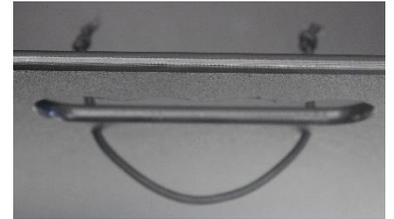

4. Connect End Panels so that the T-Connectors on the End Panels are adjacent to the T-Connectors on the Handle Panels. Use screws (B) to secure End Panels via T-Connectors.

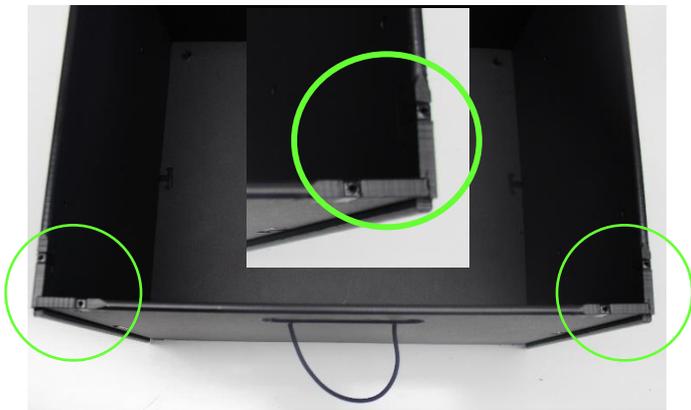

5. Install corner connectors (D) on bottom of Base Panel. Secure with self-tapping screws (A) from the top of the Base Panel



6. Install Mighty Mount Connectors (E) on Top corners using Screws (C)



7. Install hinges, oriented as pictured, in the pre-drilled holes on the Handle Panel. Secure with 3/8 machine screws & thin lock nuts.



7. Set Lid onto BlackPak, positioned so the hinge cut-outs align with the hinges. Rotate hinges over holes and secured with $\frac{3}{8}$ screws and thin lock-nuts.



8. Set the BlackPak in your NuCanoe and determine if you want the hinges to be on the right or the left. Then install the Rod Tubes using $\frac{3}{8}$ machine screw and lock nut on the End Panel that is to the back. Note: You can also re-orient your BlackPak by reversing the Rod Tubes.



9. Insert the 6" webbing strap through the desired slot from the inside to align with the Track. Utilize bottom slots on outsides. Connect female buckle. Repeat on opposite side.



10. Secure Deck Ring Webbing Strap to male buckle. Insert Track Slider into track. Connect Deck to Track Slider and secure with Mighty Bolt.



11. Connect Buckles & Tighten.

Center Slot



Side Slot

